




18 x 18 mm NTAG Inlay/Label

This inlay/label meets with ISO14443A standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

Antenna Size	18 x 18 mm
Wet Inlay/Label Size	21 x 21 mm (customized)
Material	Coated Paper / PET / PP Paper / Fragile Paper
Working Temp	-40~+85°C
Storage Temp	-20~50°C
Storage Humidity	20%~90% RH
RFID Standard	ISO14443A
Chip Type	NXP Ntag213/215/216
Read Range	0 - 10 cm
Data Storage	> 10 years
Re-write	100000 times
Customization	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Application	IT asset Tracking Library management Document tracking management Dangerous goods management

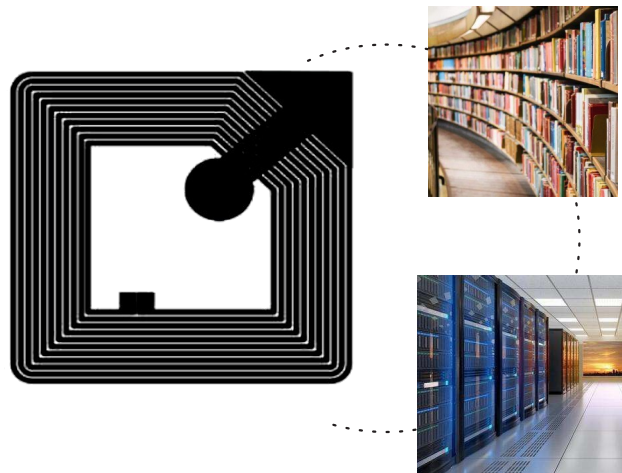


SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

www.scivas.com Tel: +86-20-87097510

Dimensions:

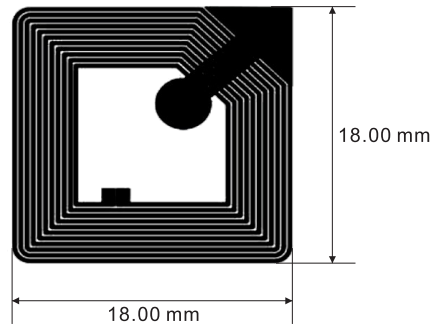

Application:

