


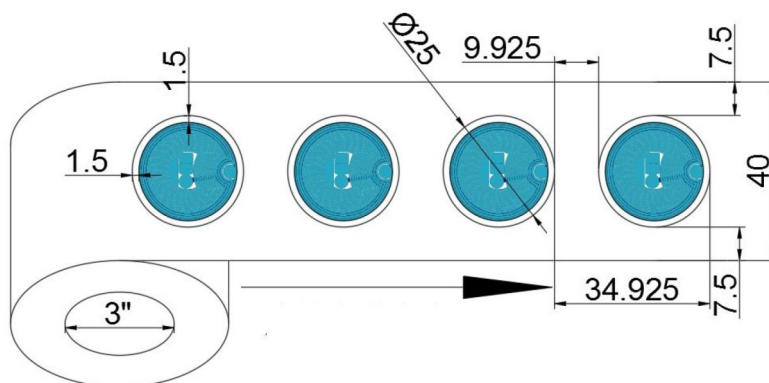

D=22 mm ICODE Inlay/Label

This inlay meets with ISO15693 standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

Antenna Size D22mm

Wet Inlay/Label Size D25mm (customized)

Material Coated Paper / PET / PP Paper / Fragile Paper

Working Temp -40~+85°C

Storage Temp -20~50°C

Storage Humidity 20%~90% RH

RFID Standard ISO15693

Chip Type NXP Icode SLIX/SLIX2/SLIX-S/SLIX-L/SLI/SLI-S

Read Range 0 - 1.0 cm

Data Storage > 10 years


Re-write 100000 times

Customization Printing LOGO, Barcode, Serial number, Encoding, Designing, etc.

Package Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton

Application IT asset Tracking | Library management
Document tracking management | Dangerous goods management

Dimensions:

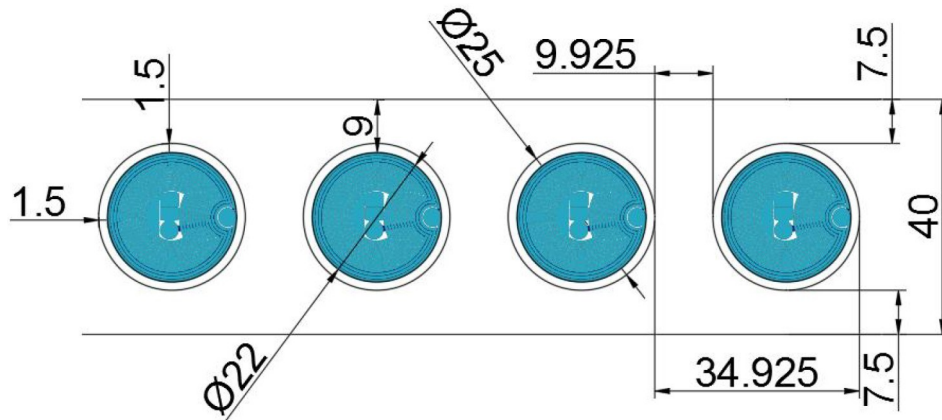

Application:

