



SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

WEBSITE: www.scivas.com

TEL: +86-20-87097510

Product Model: HTR4534-1 *260°C High Temperature RFID tags*




Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	US(902-928MHZ), EU(865-868MHZ)
IC type:	Alien Higgs-3,NXP UCODE 8
Memory:	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Write Cycles:	100,000 times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	3.5m, US(902-928MHZ) 3.5m, EU(865-868MHZ)
Read Range : (Handheld Reader)	2.6m, US(902-928MHZ) 2.6m, EU(865-868MHZ)
Warranty:	1 Year

Physical Specification:

Size:	45x34mm, Hole: D4mmx2
Thickness:	11mm
Material:	304 stainless steel
Colour:	Gray
Mounting Methods:	Screw ,Welding
Weight:	34g

Dimensions:

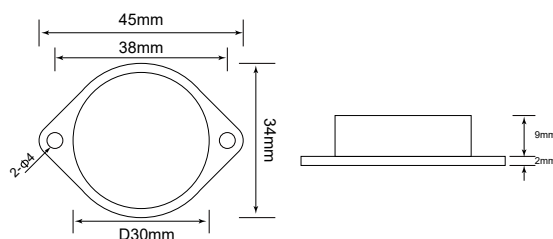



SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

WEBSITE: www.scivas.com

TEL: +86-20-87097510

Environmental Specification:

IP Rating: IP68

Storage Temperature: -50°C to +260°C, +300°C 100 hours


Operation Temperature: -40°C to +150°C

Reliability testing terms and results:

- Withstand 300°C for 100 hours continuously without damage.
- Withstand 280°C for 1000 hours continuously without damage.
- Withstand 260°C for 2000 hours continuously without damage.
- Withstand -20°C for 8 hours, then 260°C for 16 hours per day, 80 days continuously without damage.
- Withstand from 150°C to -40°C, 7.5 cycles per day, 80 days continuously with total 600 cycles without damage.

Reach Approved, RoHS Approved, CE Approved, ATEX Approved.

US, Metal Surface(902-928MHZ):

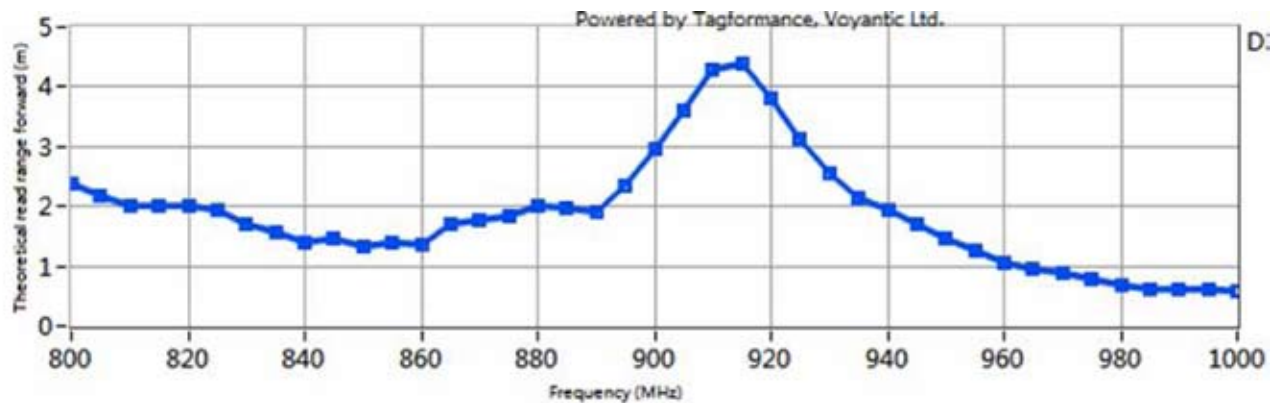

EU, Metal Surface(865-868MHZ):

