


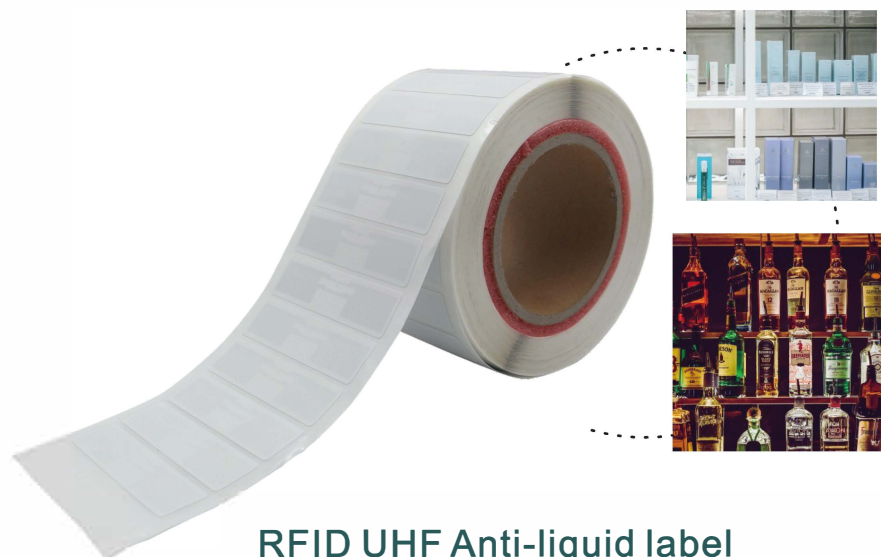

RFID UHF Anti-liquid label

Normal RFID label couldn't be used for liquid. This label is specially designed for anti-liquid application, such as water, drink, alcohol, cosmetics, perfume, blood bag, etc. It is compliant with EPC C1G2 (ISO18000-6C) standard, operating frequency is 860 ~ 960MHz (It can be used worldwide). Each tag has a unique ID and stores user data.

Physical Features:

Model:	LR7320-2
Material:	PET/Coated paper
Dimensions:	73 x 20 mm(customized)
Working Temp:	-40~+85°C
Storage Temp:	23±3 °C
Storage Humidity:	50±15 %RH
IP Code:	IP68, test for 5 hours at 1m deep water

RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	NXP UCode 8
Memory:	User - N/A; EPC - 128 bits; TID - 96 bits
Read Range(Fixed Reader):	9.0 m, on liquid

Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Support Printer:	SATO CL4NX, Zebra ZT410 Silverline, Postek TX3r, etc.
Customization:	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc
Package:	Reel core inner diameter: 76.2 mm / 3", Outside diameter < 220 mm / 8.7", 1000-5000 pcs/roll.
Application:	• Liquid container management • Cosmetic management • Wine management • Pharmaceutical management, etc.




SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY


RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

www.scivas.com Tel: +86-20-87097510


Dimensions:

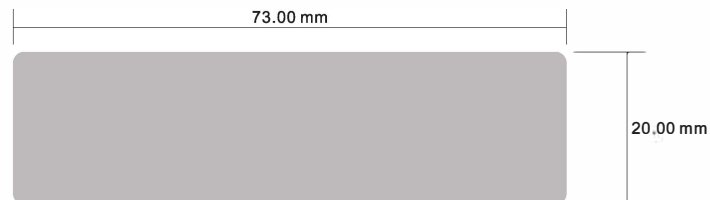

Read Range(2W ERP on liquid):

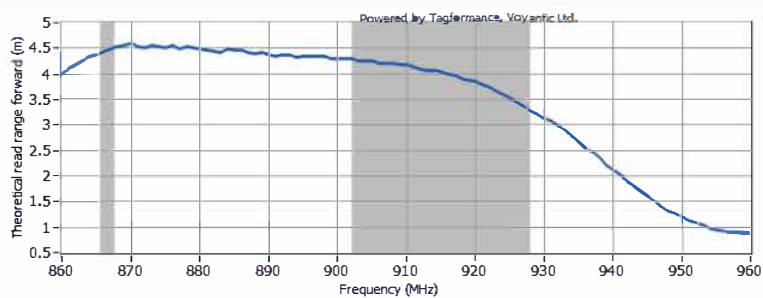

on liquid

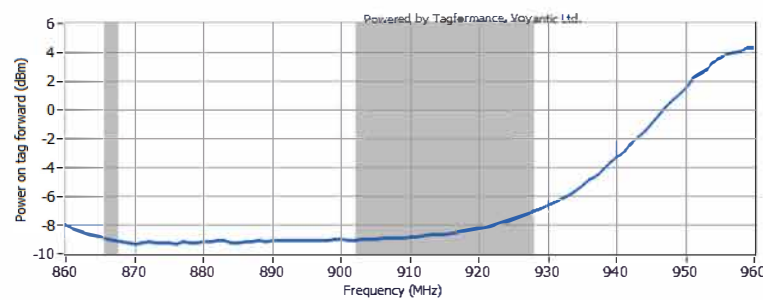

on liquid



Application:

