


PCB On-Metal UHF RFID Tag Product Datasheet

Model: P8005-1

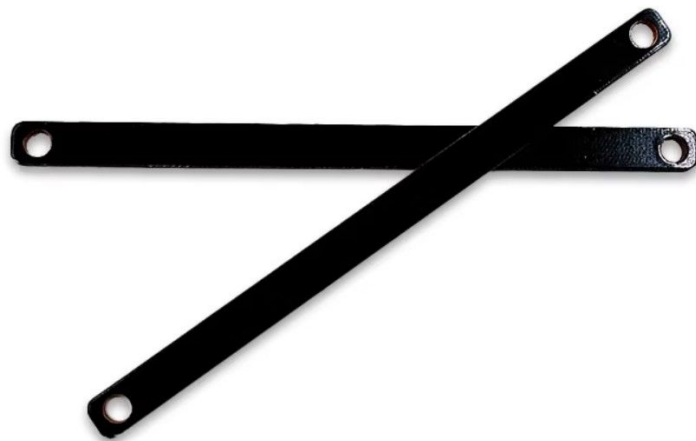

Our **PCB On-Metal UHF RFID Tags** are designed for superior performance on metal surfaces, offering high read stability and long-range readability in demanding environments. Built with high-quality PCB materials, these tags are corrosion-resistant, shockproof, and vibration-resistant, ensuring durability and reliability.


Featuring waterproof and dustproof (IP67) protection, they are ideal for both indoor and outdoor use. With excellent anti-interference capabilities, they deliver consistent performance even in high-interference settings.

Perfect for asset tracking, logistics, and industrial applications, our tags combine robust design and exceptional performance to meet your toughest tracking needs.


1. Product Parameters

Mdoel	P8005-1
Material	PTFE
Color	Black
Dimensions	80 x 5 x 2 mm (L x W x T)
Working Temp	-40~+85℃
Ultimate Temp	180℃/10 hours; 250℃/150minutes; 280℃/50 minutes
IP Code	IP68
Humidity	98% Non-condensing
RFID Standard	EPC C1G2 (ISO18000-6C)
Chip Type	NXP Ucode 8
Memory	User -N/A; EPC - 128 bits; TID - 96 bits
Read Range(Fixed Reader)	FCC: 11.5 m, on metal; ETSI: 9.5 m, on metal
Read Range(Handheld Reader)	FCC: 4.0 m, on metal; ETSI: 3.0 m, on metal
Data Storage	> 10 years
Re-write	100000 times
Installation	3M adhesive, Rivet, Magnet, Screw
Customization	Printing LOGO, Barcode, Serial number, Encoding, Designing,etc

2. Product Dimensions

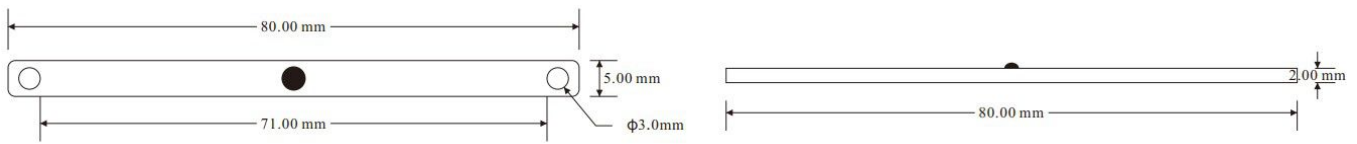

3. Reading Range

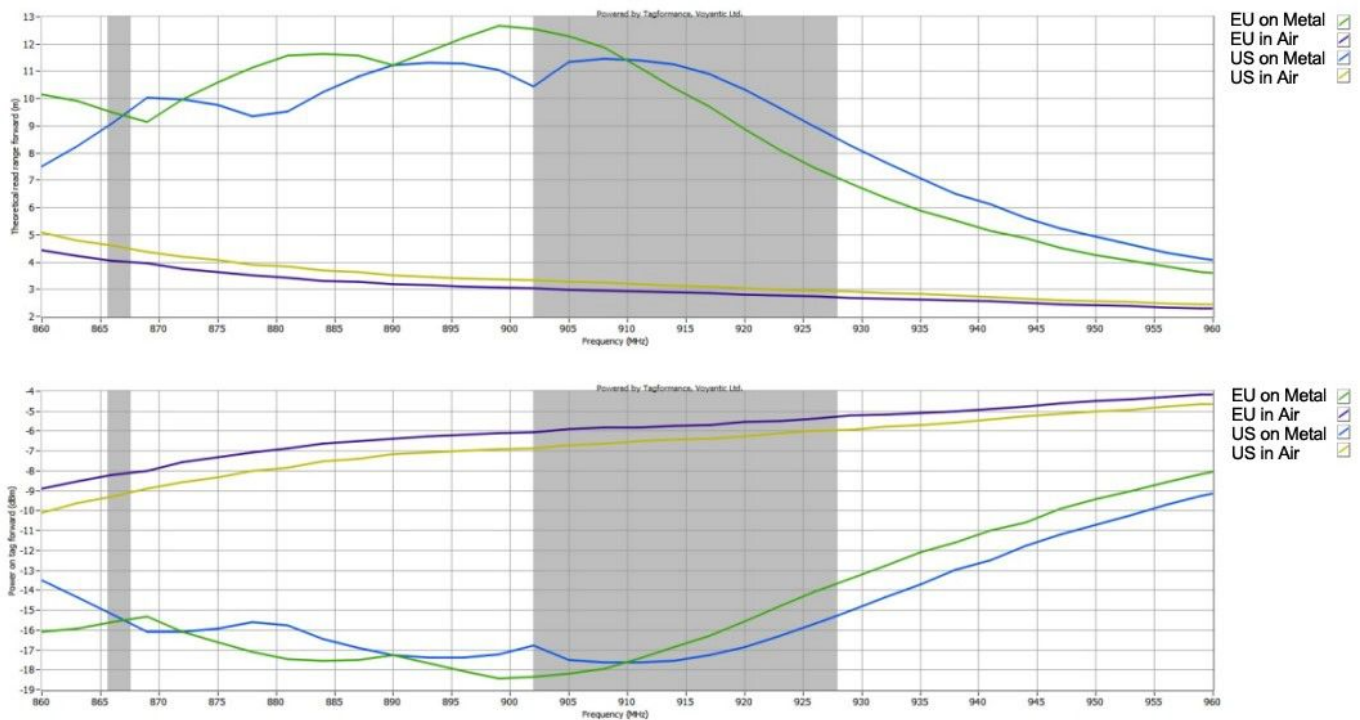

4. Application

- Asset Tracking in Industrial Environments
- IT and Data Center Management
- Automotive and Aerospace Industries
- Medical Equipment Management
- Retail and Inventory Management
- Logistics and Supply Chain